


SB 55/600

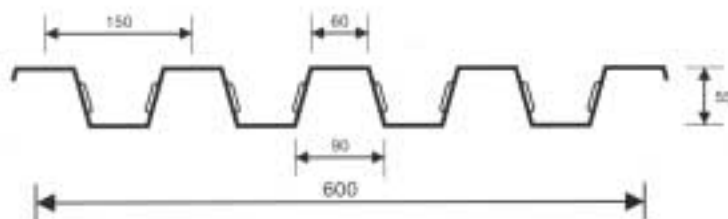

spessore	mm.	0,6	0,7	0,8	0,9	1,0	1,25
peso	kg/m ²	7,85	9,15	10,46	11,77	13,8	16,35
J cm ⁴ /m		38,79	47,17	55,83	64,68	73,66	96,29
W cm ³ /m		11,26	13,95	16,81	19,83	22,98	31,29

N.B. le quote si riferiscono ad un profilo di spessore medio.

DIAMETRI RETE A MAGLIA SALDATA DA 150X 150 MM

distanza fra gli appoggi	altezza soletta			
	12	13	14	15
< 2,00 m	3,5	3,5	4,0	4,5
2,00 ÷ 3,60 m	3,5	4,5	4,5	4,5
> 3,60 m	4,5	5,0	5,0	5,0

CARATTERISTICHE DELLA LAMIERA

spessore	mm	0,7	0,8	1	1,20	1,5
peso	kg/m ²	9,15	10,45	13,10	15,70	19,60
peso	kg/m	5,50	6,28	7,85	9,42	11,77
J totale	cm ⁴ /m	56,02	64,02	80,03	96,03	120,00
J ridotto	cm ⁴ /m	47,72	55,13	70,66	86,33	109,25
Ws	cm ² /m	13,29	15,75	21,08	26,67	34,72
Wi	cm ³ /m	20,59	23,66	28,89	35,89	44,62
y	cm	2,48	2,48	2,48	2,48	2,48
Af	cm ² /m	11,66	13,33	16,66	20,00	25,00

spessore	L	distanza tra gli appoggi in metri																
		1	1,25	1,5	1,75	2	2,3	2,5	2,8	3	3,3	3,5	3,8	4	4,3	4,5	4,8	5
	0,6	1,433	914	633	463	352	277	223	183	152	128	110	94	82	72	63	56	50
							266	192	142	108	83	65	51	41	33	26	21	17
	0,7	1,776	1,133	784	573	436	343	276	226	188	159	136	117	102	89	78	69	61
							324	233	173	131	101	79	62	49	40	32	25	20
	0,8	2,142	1,367	946	693	528	415	334	275	229	194	166	143	124	109	96	85	76
							385	278	206	157	121	95	75	60	49	39	32	26
0,9	2,528	1,614	1,118	819	625	491	396	326	272	230	197	170	149	131	115	102	92	
						448	324	241	183	142	112	89	71	58	47	39	32	
1	2,929	1,871	1,295	948	723	569	459	377	315	266	228	197	172	151	133	116	106	
					730	509	368	273	208	161	126	101	81	65	53	43	36	
1,25	3,990	2,548	1,765	1,293	986	776	626	515	430	364	312	270	235	207	183	163	145	
					955	666	482	358	272	211	166	132	106	86	70	57	47	
	0,6	1,794	1,145	793	580	442	348	280	230	192	163	139	120	105	92	81	72	64
										185	144	114	91	73	60	49	41	34
	0,7	2,224	1,420	984	721	550	433	349	287	240	203	174	151	132	116	102	91	81
										227	177	140	112	91	75	62	51	43
	0,8	2,680	1,711	1,185	868	662	521	420	346	289	245	210	181	158	139	123	109	98
									351	268	208	165	132	107	88	72	60	50
0,9	3,163	2,021	1,400	1,026	783	617	498	410	343	290	249	216	188	166	147	131	114	
								408	312	243	193	155	126	103	85	71	60	
1	3,665	2,341	1,622	1,189	907	714	576	474	397	336	288	249	218	192	170	151	135	
								464	354	276	219	176	143	117	97	80	67	
1,25	4,991	3,189	2,210	1,620	1,237	974	786	647	541	459	394	341	298	262	232	207	185	
								607	464	362	287	230	187	153	127	106	88	

I valori in colore non prevedono una limitazione di freccia inferiore ad 1/200 della luce