


# SB 75/570

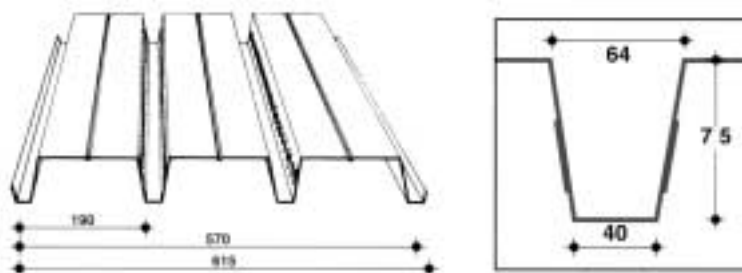

spessore	mm.	0,6	0,7	0,8	1,0	1,25	1,5
peso	kg/m <sup>2</sup>	8,25	9,65	11,00	13,75	17,18	20,65
J cm <sup>4</sup> / m		76,63	96,29	111,84	142,94	181,34	220,57
W cm <sup>3</sup> / m		20,88	22,74	26,19	32,83	41,82	51,44

N.B. le quote si riferiscono ad un profilo di spessore medio.

## DIAMETRI RETE A MAGLIA SALDATA DA 150X 150 MM

distanza fra gli appoggi	altezza soletta			
	12	13	14	15
< 2,00 m	3,5	3,5	3,5	4,0
2,00 ÷ 3,60 m	4,5	4,5	4,5	4,5
> 3,60 m	5,0	5,0	5,0	5,0

## CARATTERISTICHE DELLA LAMIERA

spessore	mm	0,7	0,8	1	1,20	1,5
peso	kg/m <sup>2</sup>	9,64	11,00	13,75	16,50	20,65
peso	kg/m	5,50	6,28	7,85	9,42	11,77
J totale	cm <sup>4</sup> /m	107,70	123,09	153,87	184,64	230,80
J ridotto	cm <sup>4</sup> /m	96,29	111,84	142,94	174,14	220,57
Ws	cm <sup>3</sup> /m	25,31	30,19	39,81	50,72	68,51
Wi	cm <sup>3</sup> /m	22,74	26,19	32,83	40,15	51,44
y	cm	4,49	4,49	4,49	4,49	4,49
Af	cm <sup>2</sup> /m	12,28	14,03	17,54	21,05	26,31

spessore	L	distanza tra gli appoggi in metri																						
		1	1,5	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5								
	mm.																							
	0,6	2330	1030	580	455	370	305	255	175	140	110	90	75	60	50	-								
									215	185	160	140	125	110	100	90								
									230	155	170	150	130	115	105	95								
									265	230	200	175	150	135	120	100								
	0,7	2535	1120	625	490	400	330	270	215	170	135	110	90	75	65	55								
									230	155	170	150	130	115	105	95								
									265	230	200	175	150	135	120	100								
									320	255	200	165	135	110	90	75								
									330	285	245	215	190	165	145	130								
	0,8	2920	1295	720	570	460	380	315	250	200	160	130	100	90	75	60								
									265	230	200	175	150	135	120	100								
									320	255	200	165	135	110	90	75								
									330	285	245	215	190	165	145	130								
									425	365	320	280	250	220	200	180								
	1	3660	1620	905	710	575	470	395	320	255	200	165	135	110	90	75								
									330	285	245	215	190	165	145	130								
									425	365	320	280	250	220	200	180								
									525	490	390	340	300	265	235	210								
									5740	2195	1325	985	800	675	490	400	315	255	210	170	145	120	100	
	1,25	4665	2195	1325	985	800	675	490	400	315	255	210	170	145	120	100								
									425	365	320	280	250	220	200	180								
									5740	2540	1420	1115	900	740	620	495	395	315	255	210	170	145	120	100
									525	490	390	340	300	265	235	210								
									7180	3180	1780	1420	1150	950	780	660	565	490	430	365	305	255	215	180
	1,5	5740	2540	1420	1115	900	740	620	495	395	315	255	210	175	145	120								
									525	490	390	340	300	265	235	210								
									7180	3180	1780	1420	1150	950	780	660	565	490	430	365	305	255	215	180
									380	335	300	270	245	220										
									7180	3180	1780	1420	1150	950	780	660	565	490	430	365	305	255	215	180

I valori in colore non prevedono limitazione di freccia

